


Output **CC CV** **DC** Input **3** PHASE **60** Hz **50** Hz

**DC POWER SOURCE
KA-1000**

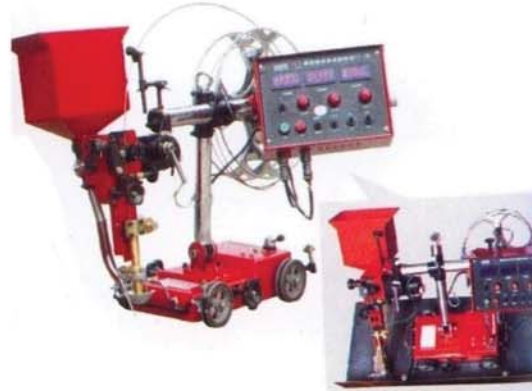

- ✓ Designed for semiautomatic and automatic welding, the precise control of the DC-1000 delivers superior high amperage MIG, flux-cored, submerged arc welding and air carbon arc gouging with up to 5/8" (15.9mm) diameter carbons.
- ✓ Digital ammeter and voltmeter.
- ✓ Protection Function such as over-heat, voltage overload and lack of power supply.
- ✓ 100% Duty cycle.

SPECIFICATION

Model : KA-1000
 Input Voltage : 415/50Hz
 Input Capacity : 66 KVA
 Open Circuit Voltage : 79V
 Current Adjust Range : 100A/24V-1000A/44V
 Duty Cycle : 100%
 Weight : 500KG
 (mm)Dimensions : 950x650x810

KOBEWEL DC WELDING POWER SOURCE

Output **CC CV** **DC** Input **3** **60** **50**
PHASE Hz Hz

DC POWER SOURCE
KA-1250



- ✓ Designed for semiautomatic and automatic welding, the precise control of the DC-1250 delivers superior high amperage MIG, flux-cored, submerged arc welding and air carbon arc gouging with up to 5/8" (15.9mm) diameter carbons.
- ✓ Digital ammeter and voltmeter.
- ✓ Protection Function such as over-heat, voltage overload and lack of power supply.
- ✓ 100% Duty cycle.

SPECIFICATION

Model : KA-1250
 Input Voltage : 415/50Hz
 Input Capacity : 83 KVA
 Open Circuit Voltage : 79V
 Current Adjust Range : 100A/24V-1250A/44VV
 Duty Cycle : 100%
 Weight : 540KG
 (mm)Dimensions : 950x650x810

KOBEWEL DC WELDING POWER SOURCE